


Excel[™] Series Specifications Whirlpool & Soaking -JAB4260 SL/SR

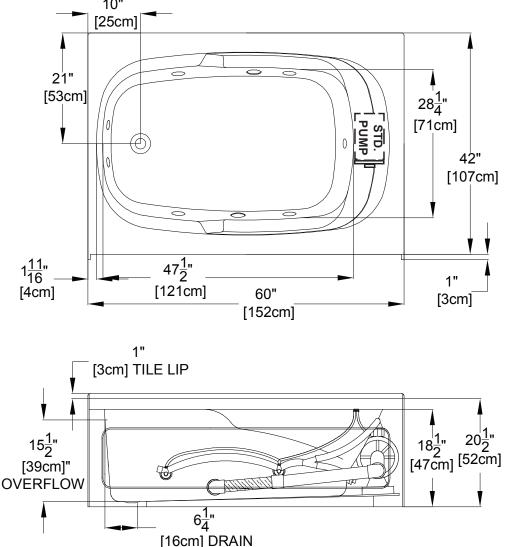

Available in End Access (Installer Provided) or Front Access (Factory Provided Removable Panel)

Patents received or pending.

Drop-in-Hole Size:NAOperating Capacity:44 Gal.Overflow Capacity:65 Gal.Floor Loading / sq.ft.:46.3/44.8 lbs.Carton Wt.:132/111 lbs.Cube:36.2 ft.3



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

Note: Dimensional Tolerances: ±1/4"

Construction: Reinforced Acrylic shell mounted on pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.