

NIO-4STLNDC

4" Iolite Square Trimless Downlight with 10° Optic

Source: 12W
850lm

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

4" Trimless Iolite downlights have no exposed trim flange and do not extend beyond the ceiling plane. Iolite Trimless requires a Trimless Mud Ring and New Construction housing. Deep regressed cone reflectors optimize visual cut-off.

FEATURES

- Trimless knife edge appearance
- Delivering up to 8233 center beam candlepower (CBCP)
- 2700K, 3000K, 3500K, 4000K @ 90+ CRI
- 10° TIR optic delivers luminous intensity of higher lumen downlights
- 5-Year limited warranty

SPECIFICATION

Construction: Trimless reflectors are constructed of heat dissipating, die-cast aluminum. The aluminum die-cast LED heat sink is threaded to fit the reflector and transfer heat.

Mounting: Luminaire includes stainless steel friction clips to mount securely to trimless mud ring. Mud ring is required per trimless downlight.

OPTIC

Each luminaire includes 10° TIR optic (Note: cannot be changed in the field)
Luminaire is also available with field changeable optics, [Click Here](#) for more information.

ELECTRICAL

Lumens / Wattage: 850lm / 12W
Color Temperature: 2700K, 3000K, 3500K, 4000K
Color Rendering Index: 90+ CRI
Operating Temperature: Specified by housing
Lifetime: 50,000 hours @ L70
Dimming: Specified by housing

COMPATIBLE HOUSINGS

Luminaires are compatible with respective Iolite housings manufactured by Nora Lighting.

CATALOG NO.	DESCRIPTION
NHIOICD-48LE4	ICAT New Construction, 120-277V; Triac / ELV / 0-10V
NHIOICD-48LUPEQ	ICAT New Construction, 120/277V; Lutron EcoSystem
NHIOICDCP-48LE4	Chicago Plenum, 120-277V; Triac / ELV / 0-10V
NHIOICDCP-48LUPEQ	Chicago Plenum, 120/277V; Lutron EcoSystem

Accessories: Luminaire will accommodate (1) hex louver and (1) translucent deco collar or opaque snoot, no accessory holder is required, see page 2. A trimless mud ring is required per trimless ([NIO-TLMR-4S](#)).

LABELS AND LISTINGS

- cULus Listed for Wet Locations
- ENERGY STAR certified
- [5-Year Limited Warranty](#)
- RoHS Compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2019




Performance Data

Part Number	Lumens	CCT	CBCP
NIO-4STLNDC40QWW	864lm	4000K	8233 cd

Delivered lumens will vary depending on CCT and finish

PRODUCT IMAGES AND DIMENSIONS




NIO-4STLNDC
Square Trimless Reflector
Non-Adjustable



BB
Black Reflector



BZ
Bronze Reflector



CH
Champagne Reflector



HZ
Haze Reflector



MPW
Matte Powder White Reflector



WW
White Reflector

4" Iolite Square Trimless Downlight with 10° Optic - New Construction Housing & Trimless Mud Ring Required

Type	Color Temperature	Finish
NIO-4STLNDC = Square Trimless	270 = 2700K	BB = Black
	300 = 3000K	BZ = Bronze
	350 = 3500K	CH = Champagne Haze
	400 = 4000K	HZ = Haze
		MPW = Matte Powder White
		WW = White

Compatible Housings

Housing Type
NHIOICD-48LE4 = ICAT New Construction; Triac / ELV / 0-10V
NHIOICD-48LUPEQ = ICAT New Construction; Lutron EcoSystem
NHIOICDCP-48LE4 = Chicago Plenum; Triac / ELV / 0-10V
NHIOICDCP-48LUPEQ = Chicago Plenum; Lutron EcoSystem

4" Iolite Trimless Mud Ring

Description
NIO-TLMR-4S = 4" Square Trimless Mud Ring

Example: **NIO-4STLNDC40QWW / NIO-TLMR-4S** = 4" Iolite Square Trimless Non-Adjustable Reflector with 10° Optic, 4000K, White finish / 4" Square Trimless Mud Ring


4" Iolite Accessories

4" Iolite Square Trimless Downlight with 10° Optic

Type
Project
Catalog No.
Notes

ACCESSORIES

Iolite accessories can be added at any point in the design process. Accessories easily install between LED module and die-cast trim. Luminaire will accommodate (1) hex louver and (1) collar accessory, no accessory holder required.

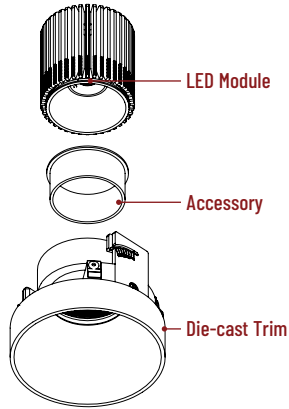

Translucent Decorative Collar

NIO-AS14(color) 5/8" length
NIO-AS19(color) 3/4" length
NIO-AS26(color) 1" length
Color:
AM (amber), **BLU** (blue), **FR** (frosted), **R** (red)


Translucent collars color the aperture with the specified color while producing white general light. Collars are available in different lengths. Use to add interest, create a theme, match a theme or define a space.



Opaque Collar Snoot

NIO-AS14(color) 5/8" length
NIO-AS19(color) 3/4" length
NIO-AS26(color) 1" length
Color:
BLK (black), **MPW** (matte powder white), **WH** (white)

Opaque snoot greatly reduces aperture brightness while preserving light output. (Note: Black snoot will reduce light)




Hex Cell Louver

NIO-HC Black
 Hex cell louver subtly reduces aperture brightness by reducing light output by about 20%.

TRIMLESS MUD RING

4" Iolite trimless has no exposed trim flange and the result is a minimalist knife edge appearance. A trimless mount mud ring is installed after the drywall and a professional drywall finisher floats the ceiling to blend in the mud ring.



Mud Ring

NIO-TLMR-4S Square Mud Ring

Mounts trimless reflector with no exposed flange and no extension beyond ceiling plane. Mud ring attaches to drywall. **Only for use with NHIOICD-48, NHIOICDCP-48 new construction housings and NIO-4STLNDC.**
 Dimensions: 7-7/8" diameter 1/2" thick

SUCTION CUP

Assist removing trimless reflector from finished ceiling after installation. For maintenance on downlight, housing and/or driver.



Suction Cup for Removal

NIO-TLSUCTION

PHOTOMETRICS

4" Iolite Square Trimless Downlight with 10° Optic

Type _____


Project _____

Catalog No. _____

Notes _____

Test Information

Test Number: NTR1897R1
 Part Number: NIO-4STLND40QWW
 Beam Spread: 12° Spot
 Lumens: 864lm
 Wattage: 12.41W
 Efficacy: 70lpw
 CCT / CRI: 4000K / 90 CRI
 Spacing Criteria (0°-180°): 0.22
 Spacing Criteria (90°-270°): 0.22



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
16'	32.2fc	3'-4"
18'	25.4fc	3'-8"
20'	14.3fc	4'-1"
22'	17fc	4'-6"
24'	14.3fc	4'-11"

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	711	2.3
0-40	801	92.6
0-60	852	98.6
0-90	864	100
90-180	0	0
0-180	864	100

Candela Table

Vertical Angles	Candela
0	8233
5	5129
15	699
25	324
35	133
45	35

Lumen Output Multipliers

Color Temperature: 2700K (0.9), 3000K (0.96), 3500K (0.96), 4000K (1.00)