UltraMax® One-Piece Toilet, ADA Height, 1.6GPF

FEATURES

- G-Max® flushing system, low consumption (1.6GPF/6.0LPF)
- One-piece decorative toilet with high-profile tank
- Elongated front bowl with SoftClose® seat (SS114)
- 12" Rough-in
- ADA compliant (when installed with trip lever located on the approach side)
- Chrome trip lever

MODELS

MS854114SL
 ADA height toilet with elongated bowl and SoftClose seat (SS114)

COLORS/FINISHES

 Standard #01 Cotton #03 Bone #11 Colonial White #12 Sedona Beige

PRODUCT SPECIFICATION

The one-piece low consumption G-Max flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall be of elongated front bowl with a high-profile tank and SoftClose seat. Toilet shall be ADA compliant (when installed with trip lever located on the approach side). Toilet shall have chrome trip lever. Toilet shall be TOTO Model MS854114SL_____.





CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1,
- Certifications: IAPMO(cUPC), State of Massachusetts , City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant (when installed with trip lever located on the approach side)





UltraMax® One-Piece Toilet, ADA Height, 1.6GPF

SPECIFICATIONS

Water Use

 Flush System
 Min. Water Pressure
 Water Surface

 1.6 GPF/6.0 LPF

 G-Max®

 8 psi (static)
 10-5/16" x 8-1/4"

Trap Diameter 2-1/8"
 Rough-in 12"
 Trap Seal 2-3/8"

• Warranty One Year Limited Warranty

• Material Vitreous china


Shipping Weight 99 lbs.


 Shipping Dimensions 32"L x 20"W x 17-3/4" H1 x 28-3/4" H2

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

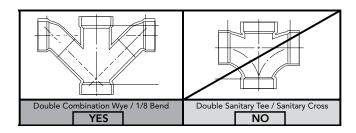

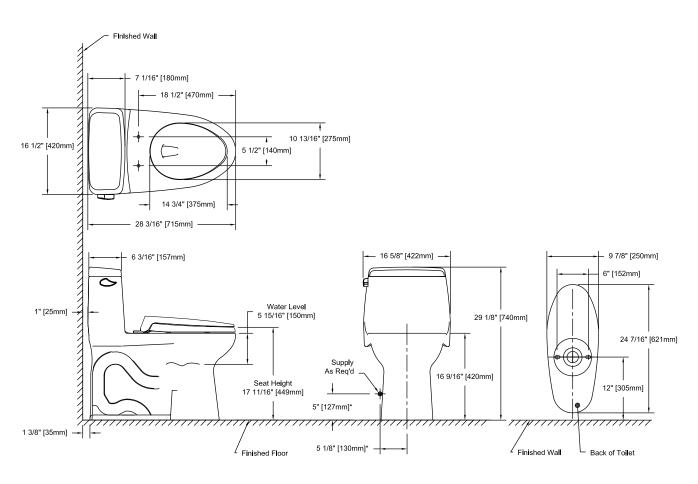

*SUGGESTED DIMENSIONS