




**Features**

- 8-1/2" spout center to center
- 16 gpm (60.6 L/min) max flow rate
- Solid brass construction
- Rough Valve & Quick Connect (08-75-99) sold separately
- Over 30 finishes including 15 PVD finishes

**Codes/Standards Applicable**

- Product meets or exceeds the following:
- ASME A112.18.2/CSA B125.2

**TO-4708**

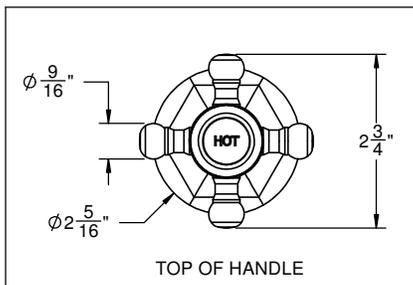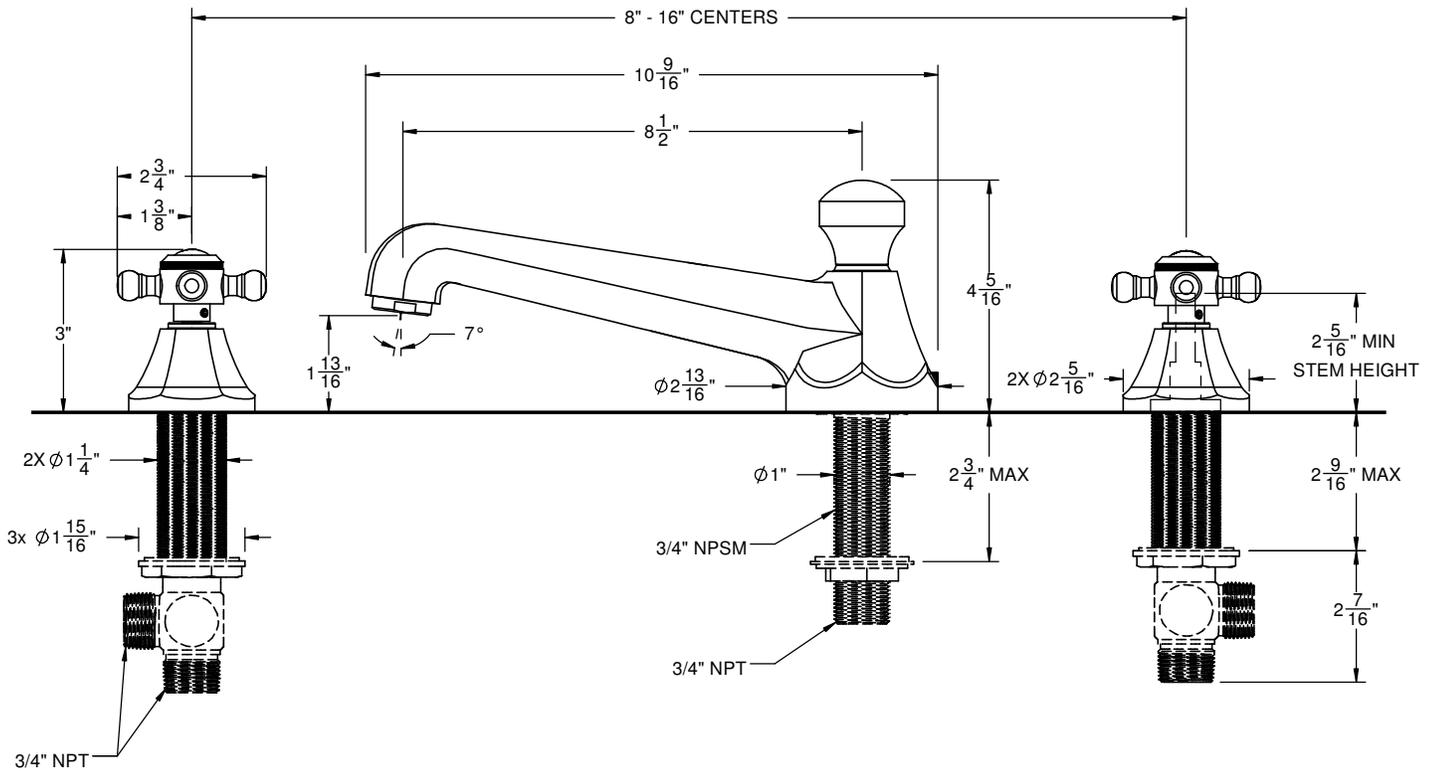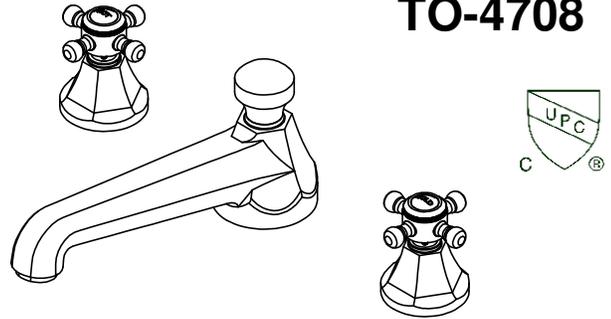

THROUGH-HOLE SPECIFICATIONS		
MIN	RECOMMENDED	MAX
SPOUT: Ø 1"	Ø 1-3/8"	Ø 1-5/8"
VALVE: Ø 1-1/4"	Ø 1-3/8"	Ø 1-5/8"

ALL DIMENSIONS SHOWN TO NEAREST 1/16"