




PRODUCT NAME: Saturn II LED Pendant  
ITEM NUMBER: E22654-11MS

Please consult your electrician for hanging fixture and wiring.

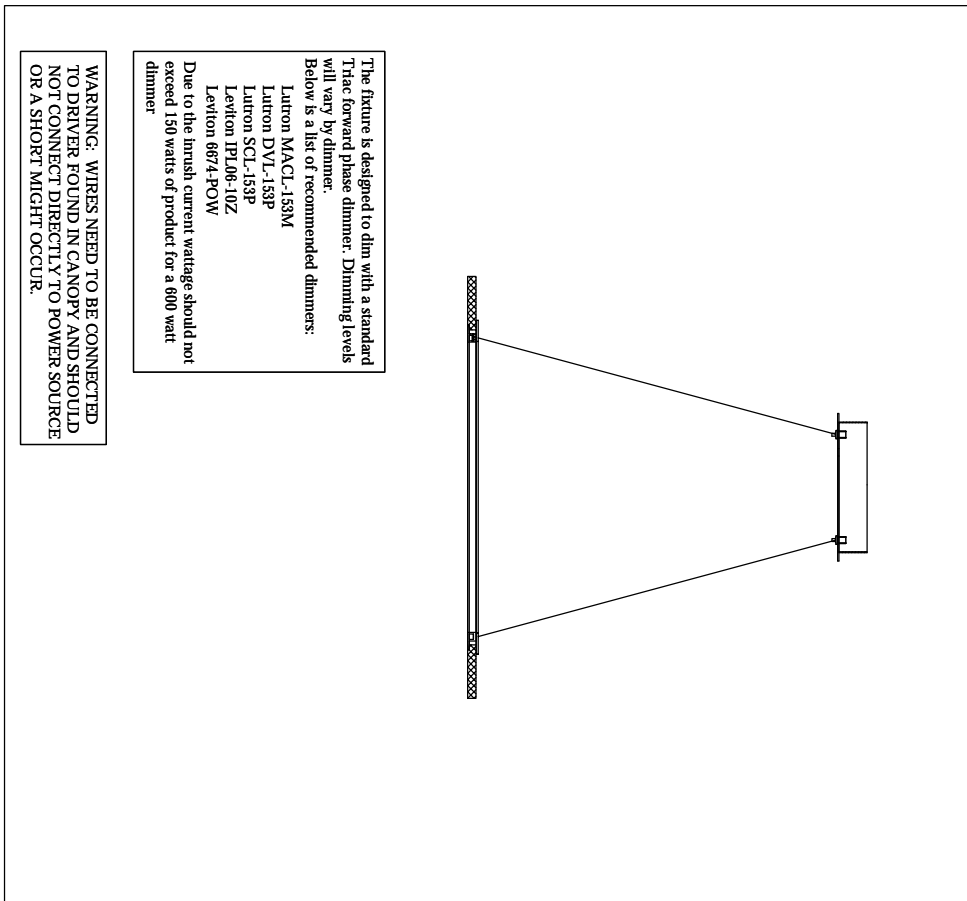

The fixture is designed to dim with a standard three forward phase dimmer. Dimming levels will vary by dimmer. Below is a list of recommended dimmers:

- Lutron MACL-153M
- Lutron DVL-153P
- Lutron SCL-153P
- Leviton IPL06-10Z
- Leviton 6874-POW

Due to the inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.


**WARNING: WIRES NEED TO BE CONNECTED TO DRIVER FOUND IN CANOPY AND SHOULD NOT CONNECT DIRECTLY TO POWER SOURCE OR A SHORT MIGHT OCCUR.**

32W LED


PRODUCTS ARE NOT INTENDED FOR COMMERCIAL USE.

MADE IN CHINA  
Page 1 of (2)

**IMPORTANT:** Turn off the power at the main fuse or circuit breaker box before starting installation

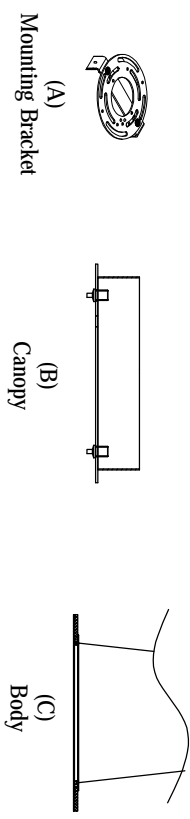


Locate all hardware & components before discarding packaging

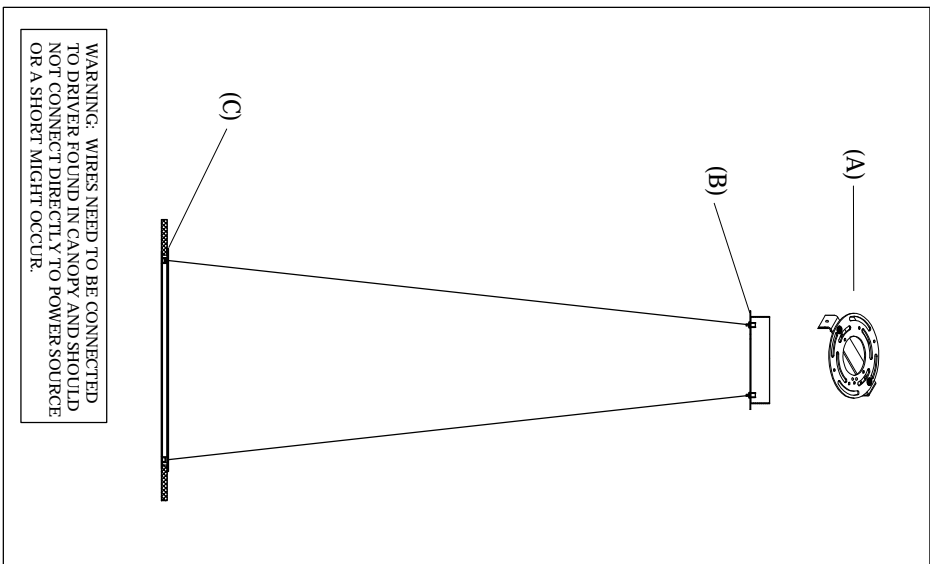


**WARNING: WIRES NEED TO BE CONNECTED TO DRIVER FOUND IN CANOPY AND SHOULD NOT CONNECT DIRECTLY TO POWER SOURCE OR A SHORT MIGHT OCCUR.**

**Cleaning & Care:**  
Clean with soft cloth and a mild detergent.  
Do not use abrasive cleaner.

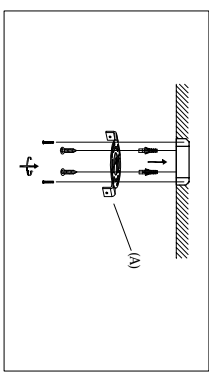


1.)

**Step 1:** Remove mounting bracket from fixture and install to electrical box. Mark where screws at ends of bracket meet the ceiling. Remove mounting bracket from ceiling. Drill holes using 3/16" drill bit where marked. Install mounting bracket to outlet box and attach anchors to secure bracket at ends.

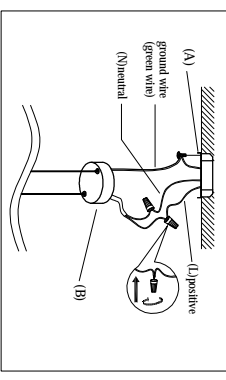

2.)

**Step 2:** Use push pins to adjust wires to desired mounting height. Wire fixture to wires in outlet box. See dual plastic wire instructions for more details. Install Green wire to Ground Screw.

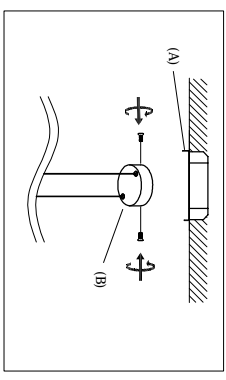

3.)

**Step 3:** Install Body (B) to Mounting Bracket (A) and tighten screws on the sides of the canopy to secure.

Page 2 of (2)